JTD2030 D8

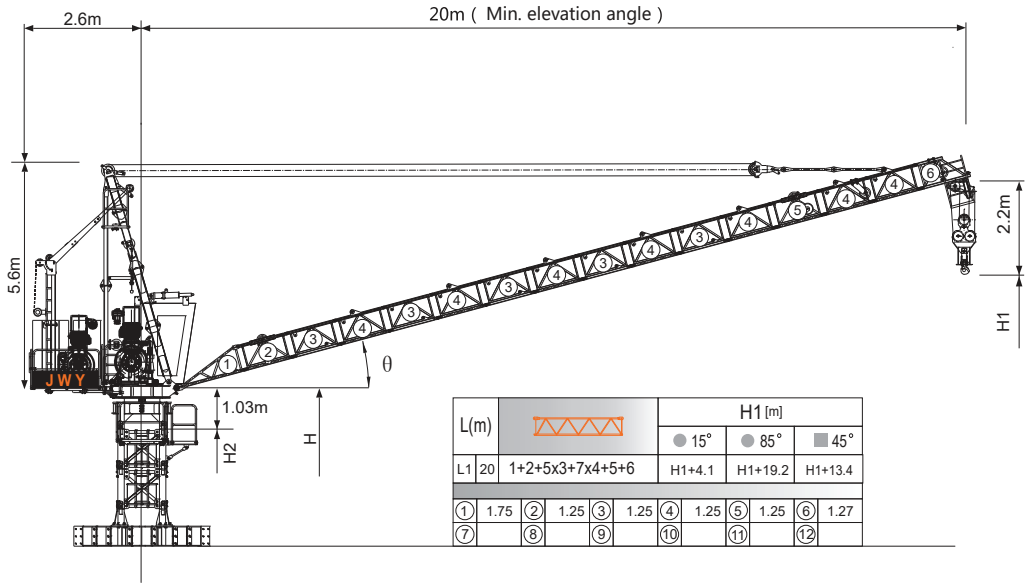

Jib root hinge height

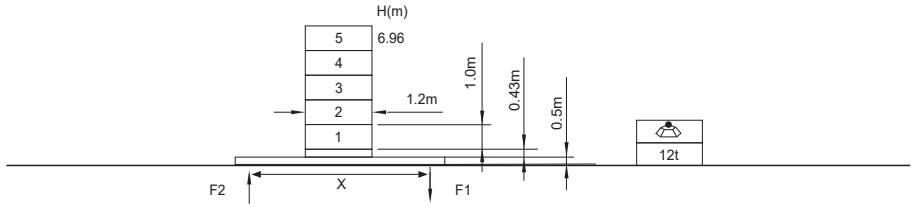

L24 ⍁1.2m	H	Jib root hinge height (not include the fixing angle)
	H1	Height under hook
	H2	Tower body height: H2 = [H - 1.03m]

Total weight of free standing height (excludes counter weight and ballast)
Total weight of counter weight
Please consult with us in case higher freestanding height needed.

● In service
■ Out of service
F Reactions
Please refer to the user manual for reaction force

Load diagrams

R	falls	R(C$_{MAX}$)	C$_{MAX}$	m	8	9	10	11	12	13	14	15	16	17	18	19	20
20m		4.3~16.2 [38.8]	4	t	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	3.7	3.5	3.2	3.0
		4.3~11.7 [56.2]	6	t	6.0	6.0	6.0	6.0	5.8	5.2	4.8	4.4	4.1	3.7	3.5	3.2	3.0
		4.3~9.1 [64.8]	8	t	8.0	8.0	7.1	6.4	5.8	5.2	4.8	4.4	4.1	3.7	3.5	3.2	3.0

Mechanisms

	50LVF20KL-D		m/min	0~42	0~84	37kW
			t	3.0	1.5	
			m/min	0~28	0~56	
			t	4.5	2.25	
			m/min	0~21	0~42	
			t	6.0	3.0	
	20VVF15KL	15~80		2min		15kW
	RCV95	rpm		0~0.8		5.5kW
	380V 50Hz(±5%) 380V 60Hz(±5%) 440V 60Hz(±5%)			70kVA		kVA

※ Please consult us △ Option